



Superior product line

# MotionProtect S Plus

 Jeweller

Wireless indoor IR motion detector with additional K-band microwave sensor to filter thermal interferences



2  
GRADE  
EN 50131

PD 6662  
2017

SOON  
INCERT

SOON  
SSF

SOON  
NFA2P

## What's new


Baseline <b>MotionProtect Plus Jeweller</b>	Superior <b>MotionProtect S Plus Jeweller</b>
SmartBracket mounting panel without screw	SmartBracket mounting panel with screw
Common battery	Enhanced battery
Glossy enclosure	Matte enclosure
Available for all PROs	Available only for accredited partners

This is the device of the **Superior product line**. Superior products is advanced versions of the Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.


# Key features




Detection range of up to 12 m<sup>1</sup>



88.5° horizontal angle




Temperature compensation




Thermal interference filter with K-band microwave sensor




SmartDetect algorithm to prevent false alarms




Effortless installation and replacement




Remote control and configuration in the app



Pairing with a hub via QR code



Up to 5 years of operation with pre-installed Panasonic battery




Pet immunity

An Ajax hub is required for operation. Find the detailed information on the device by the link:

[ajax.systems/support/devices/motionprotect-s-plus/](https://ajax.systems/support/devices/motionprotect-s-plus/)




## Motion detection range<sup>1</sup> and viewing angles

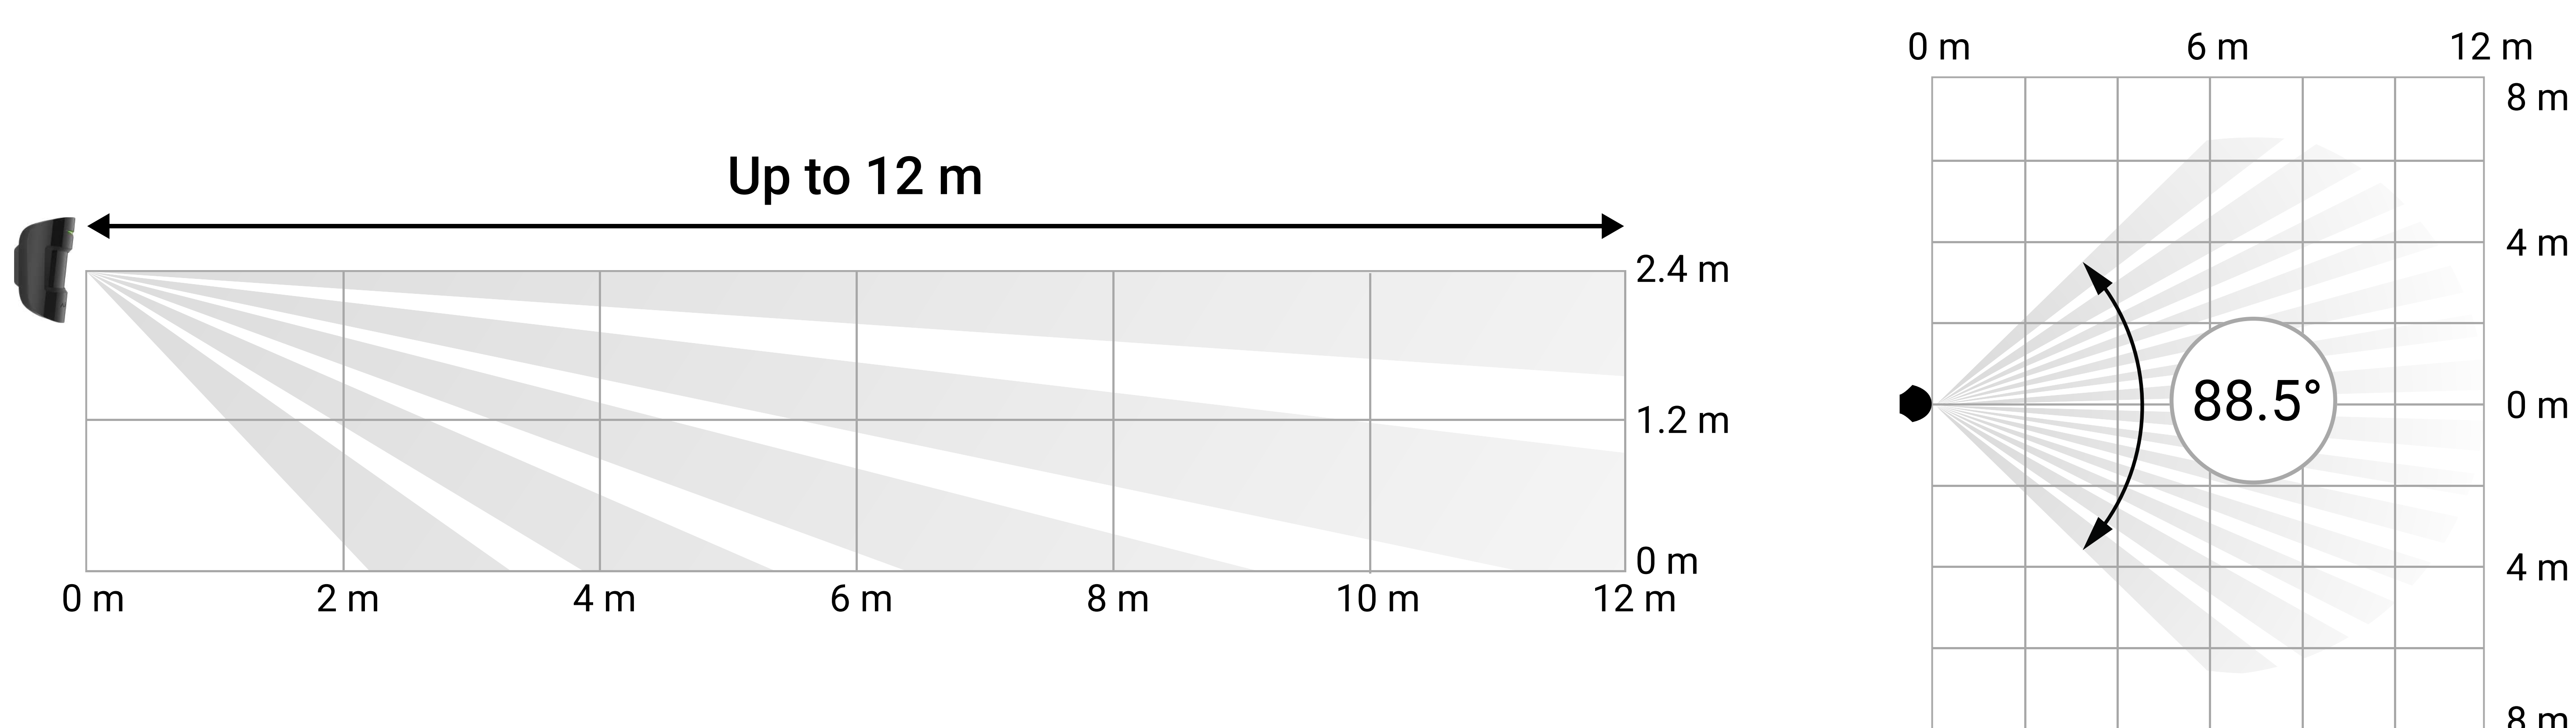

<sup>1</sup> – according to INCERT certification, detection range is up to 8 m (high sensitivity).



# False alarm prevention


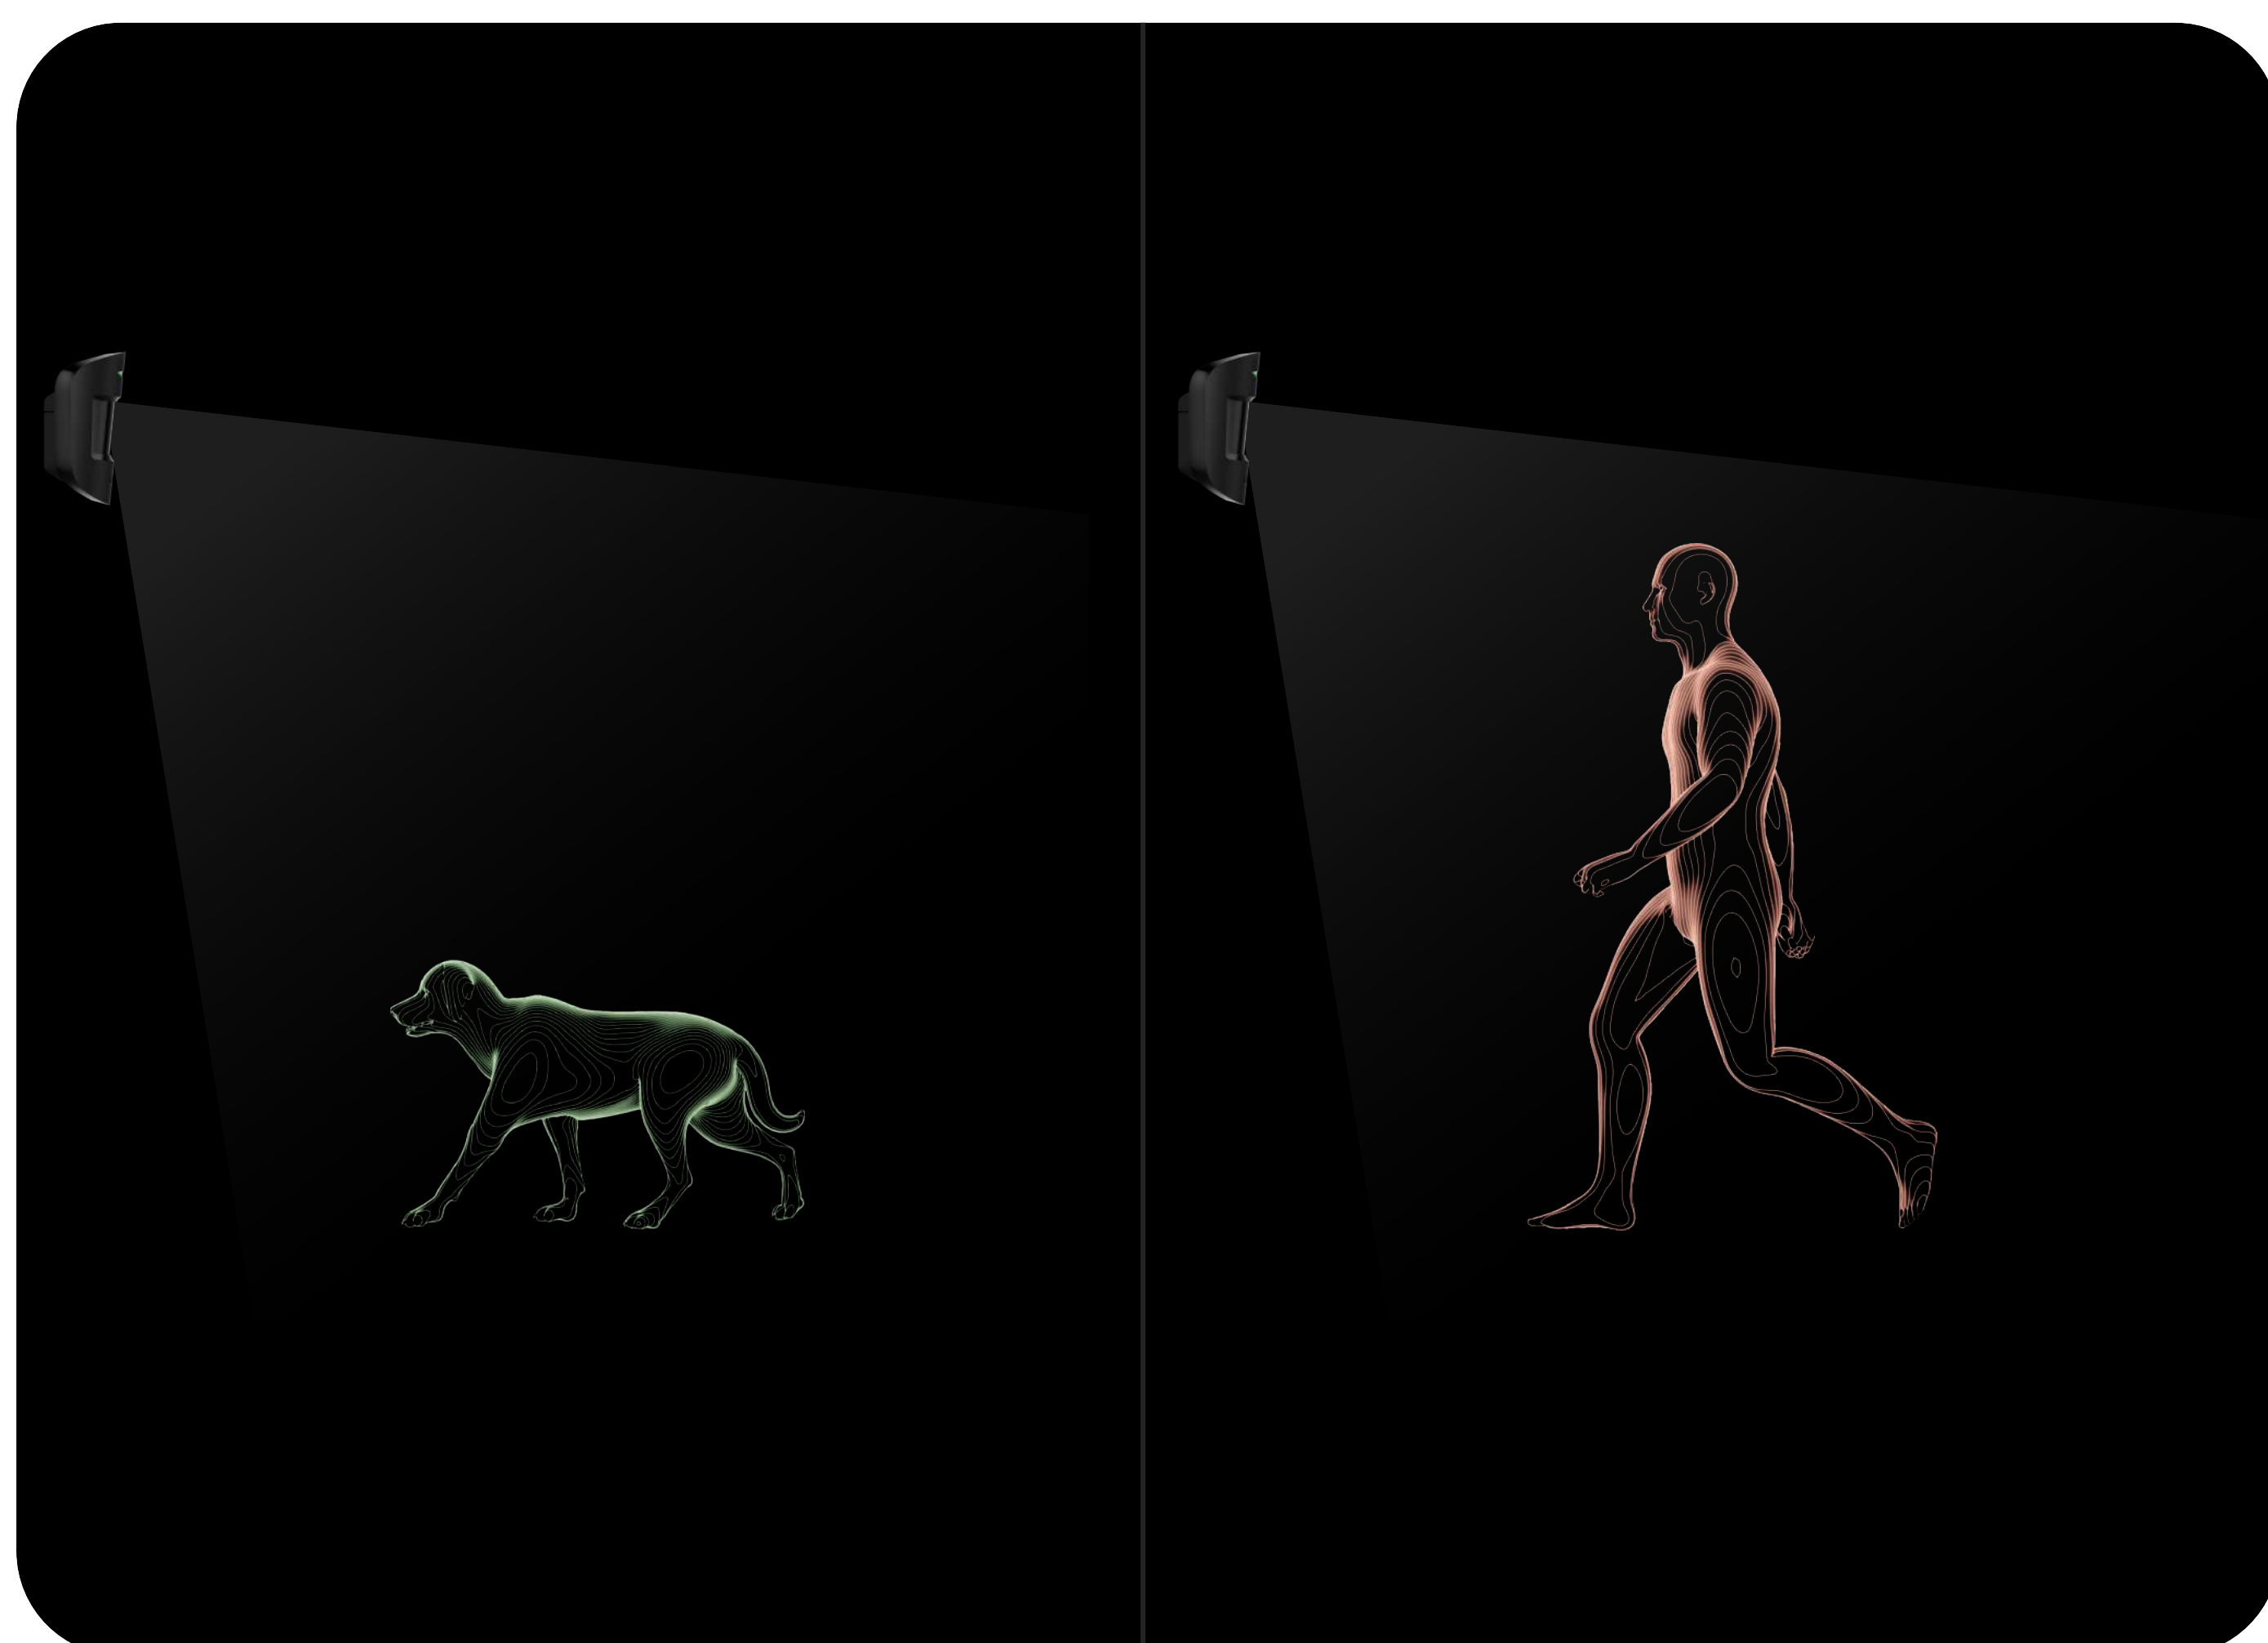


## Optics

The detector lens is highly sensitive to human motion, cutting off false alarms caused by other sources of IR radiation. The lens is designed so that potential IR radiation from pets and other interferences affect only the small lens sections. Large sections, on the contrary, are focused on the most likely places of burglar motion.

## Hardware

MotionProtect S Plus features an additional K-band microwave sensor. When the device detects motion, it conducts an RF scan of the facility to eliminate false alarms due to thermal interference: air flows, heated by the sun curtains and blinds, fans, fireplaces, air conditioners, and other likely sources of false alarms.

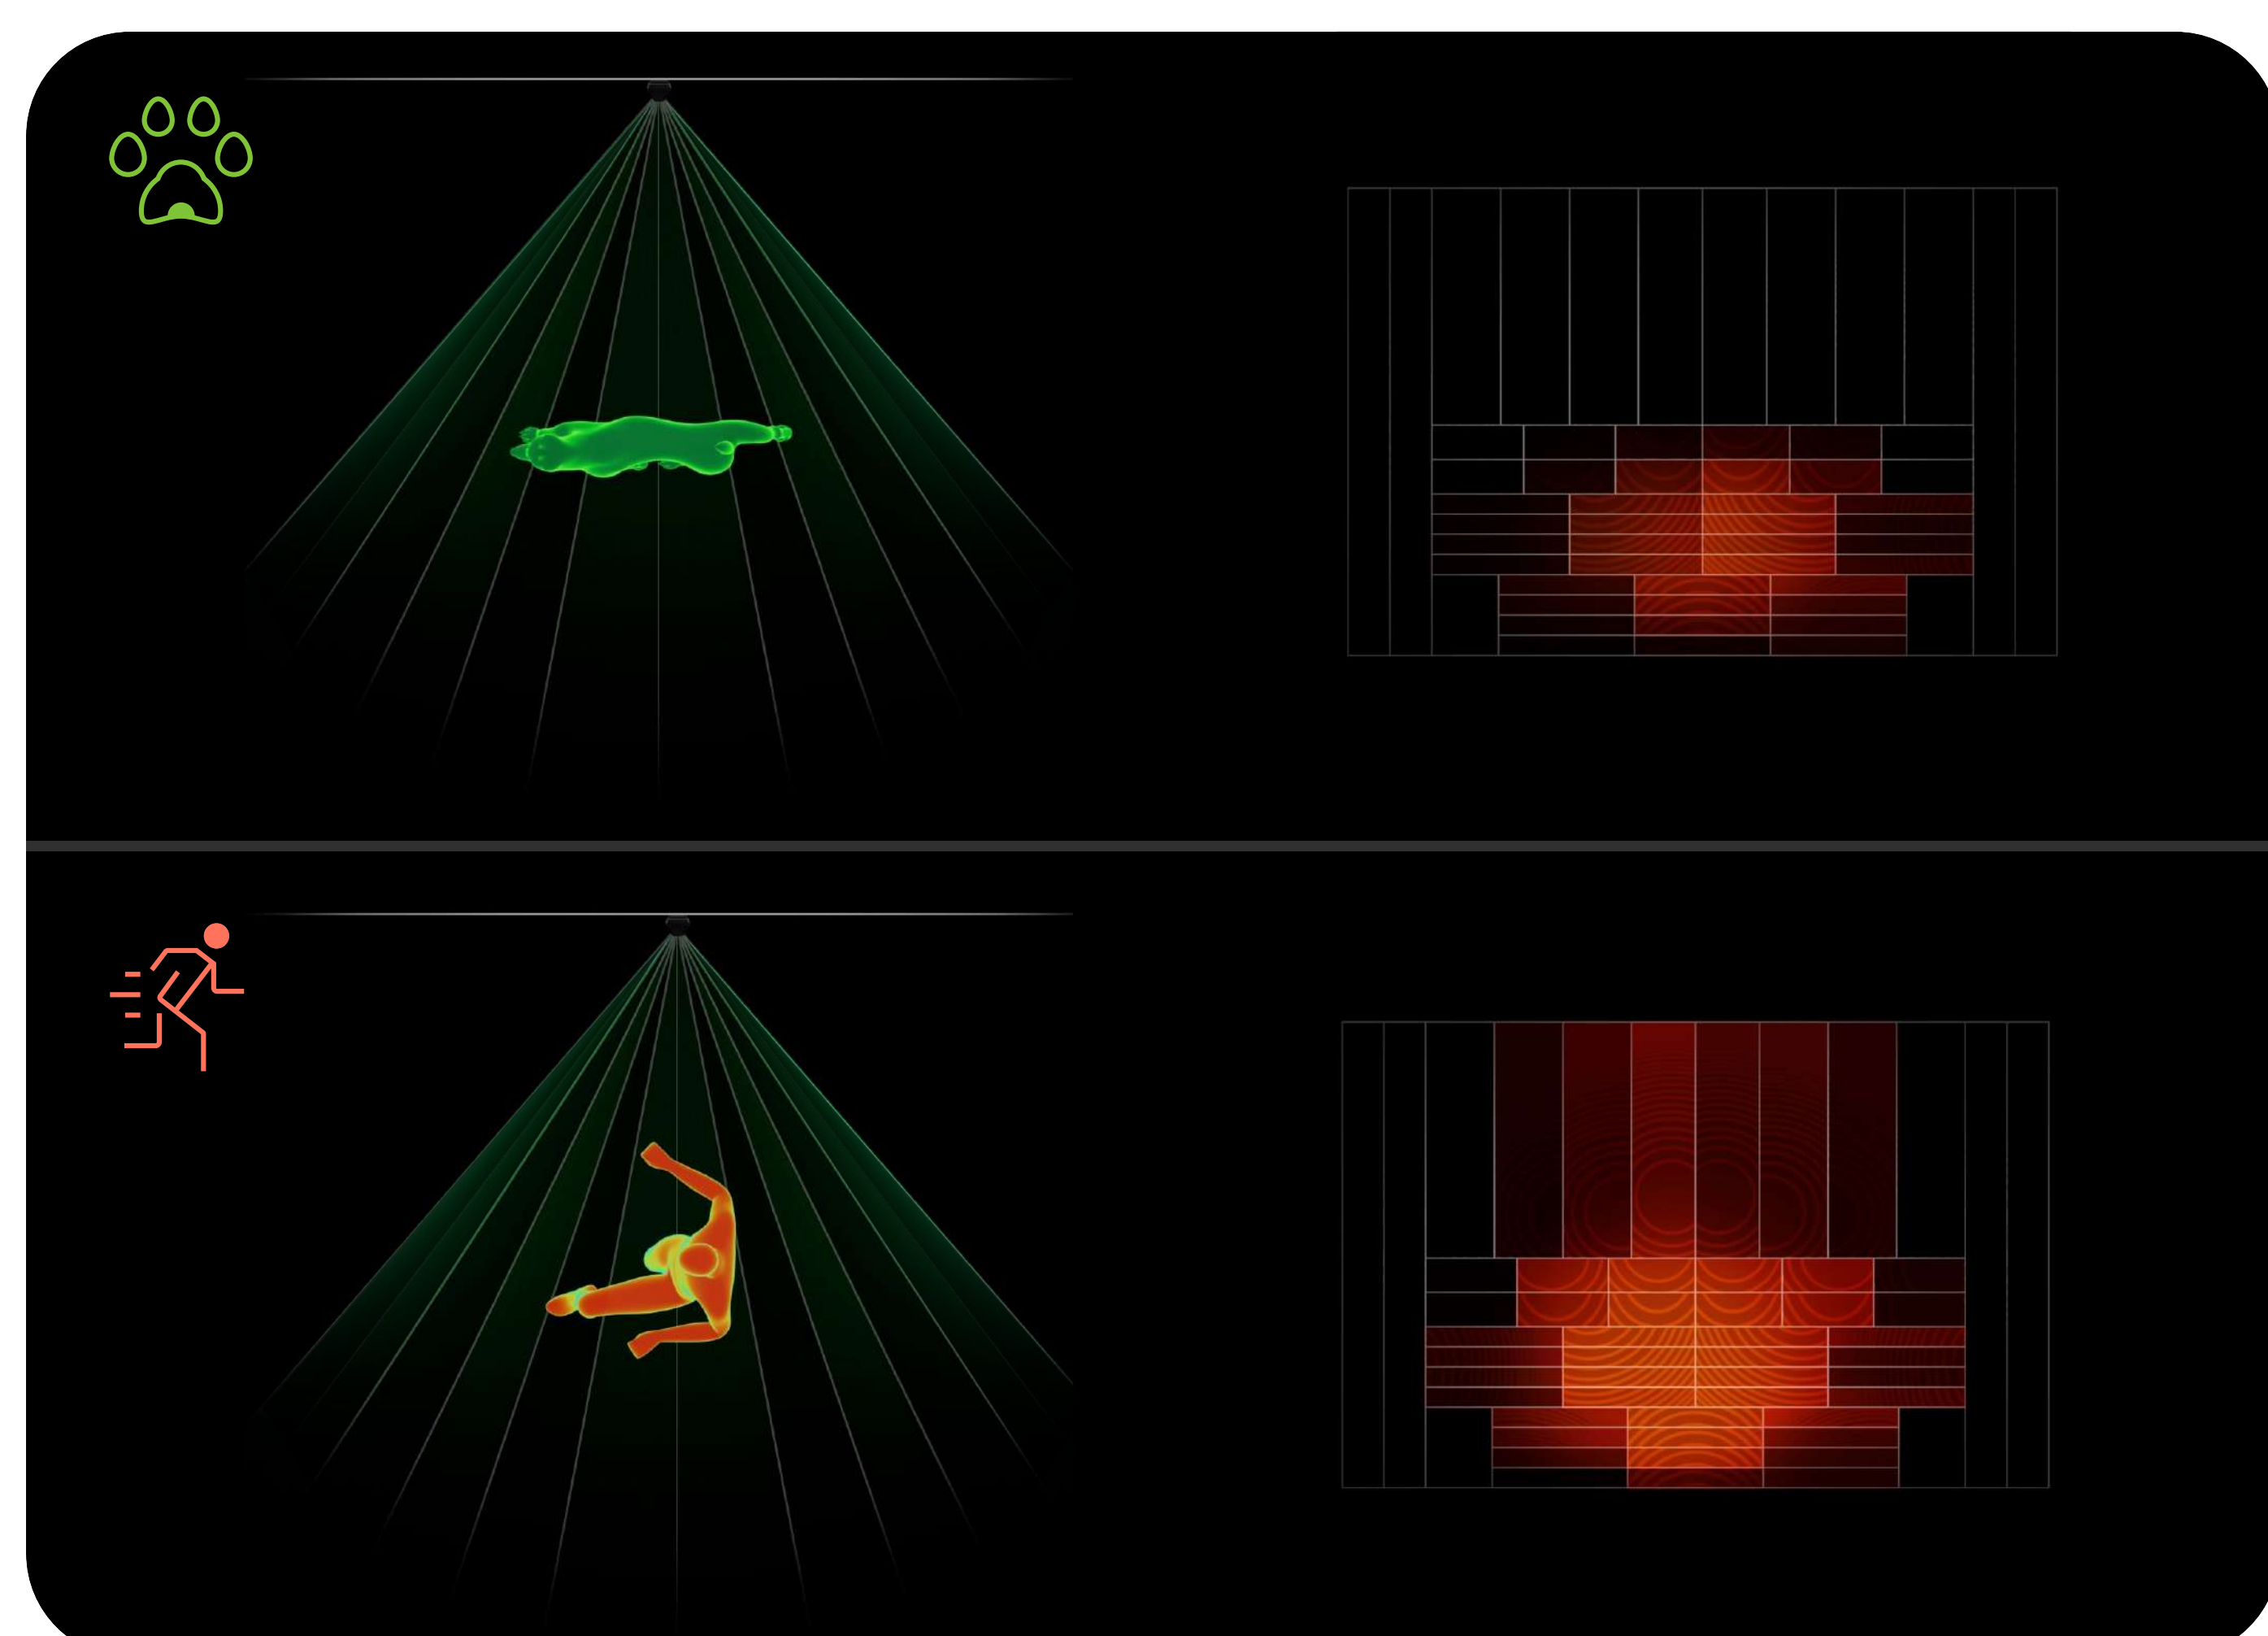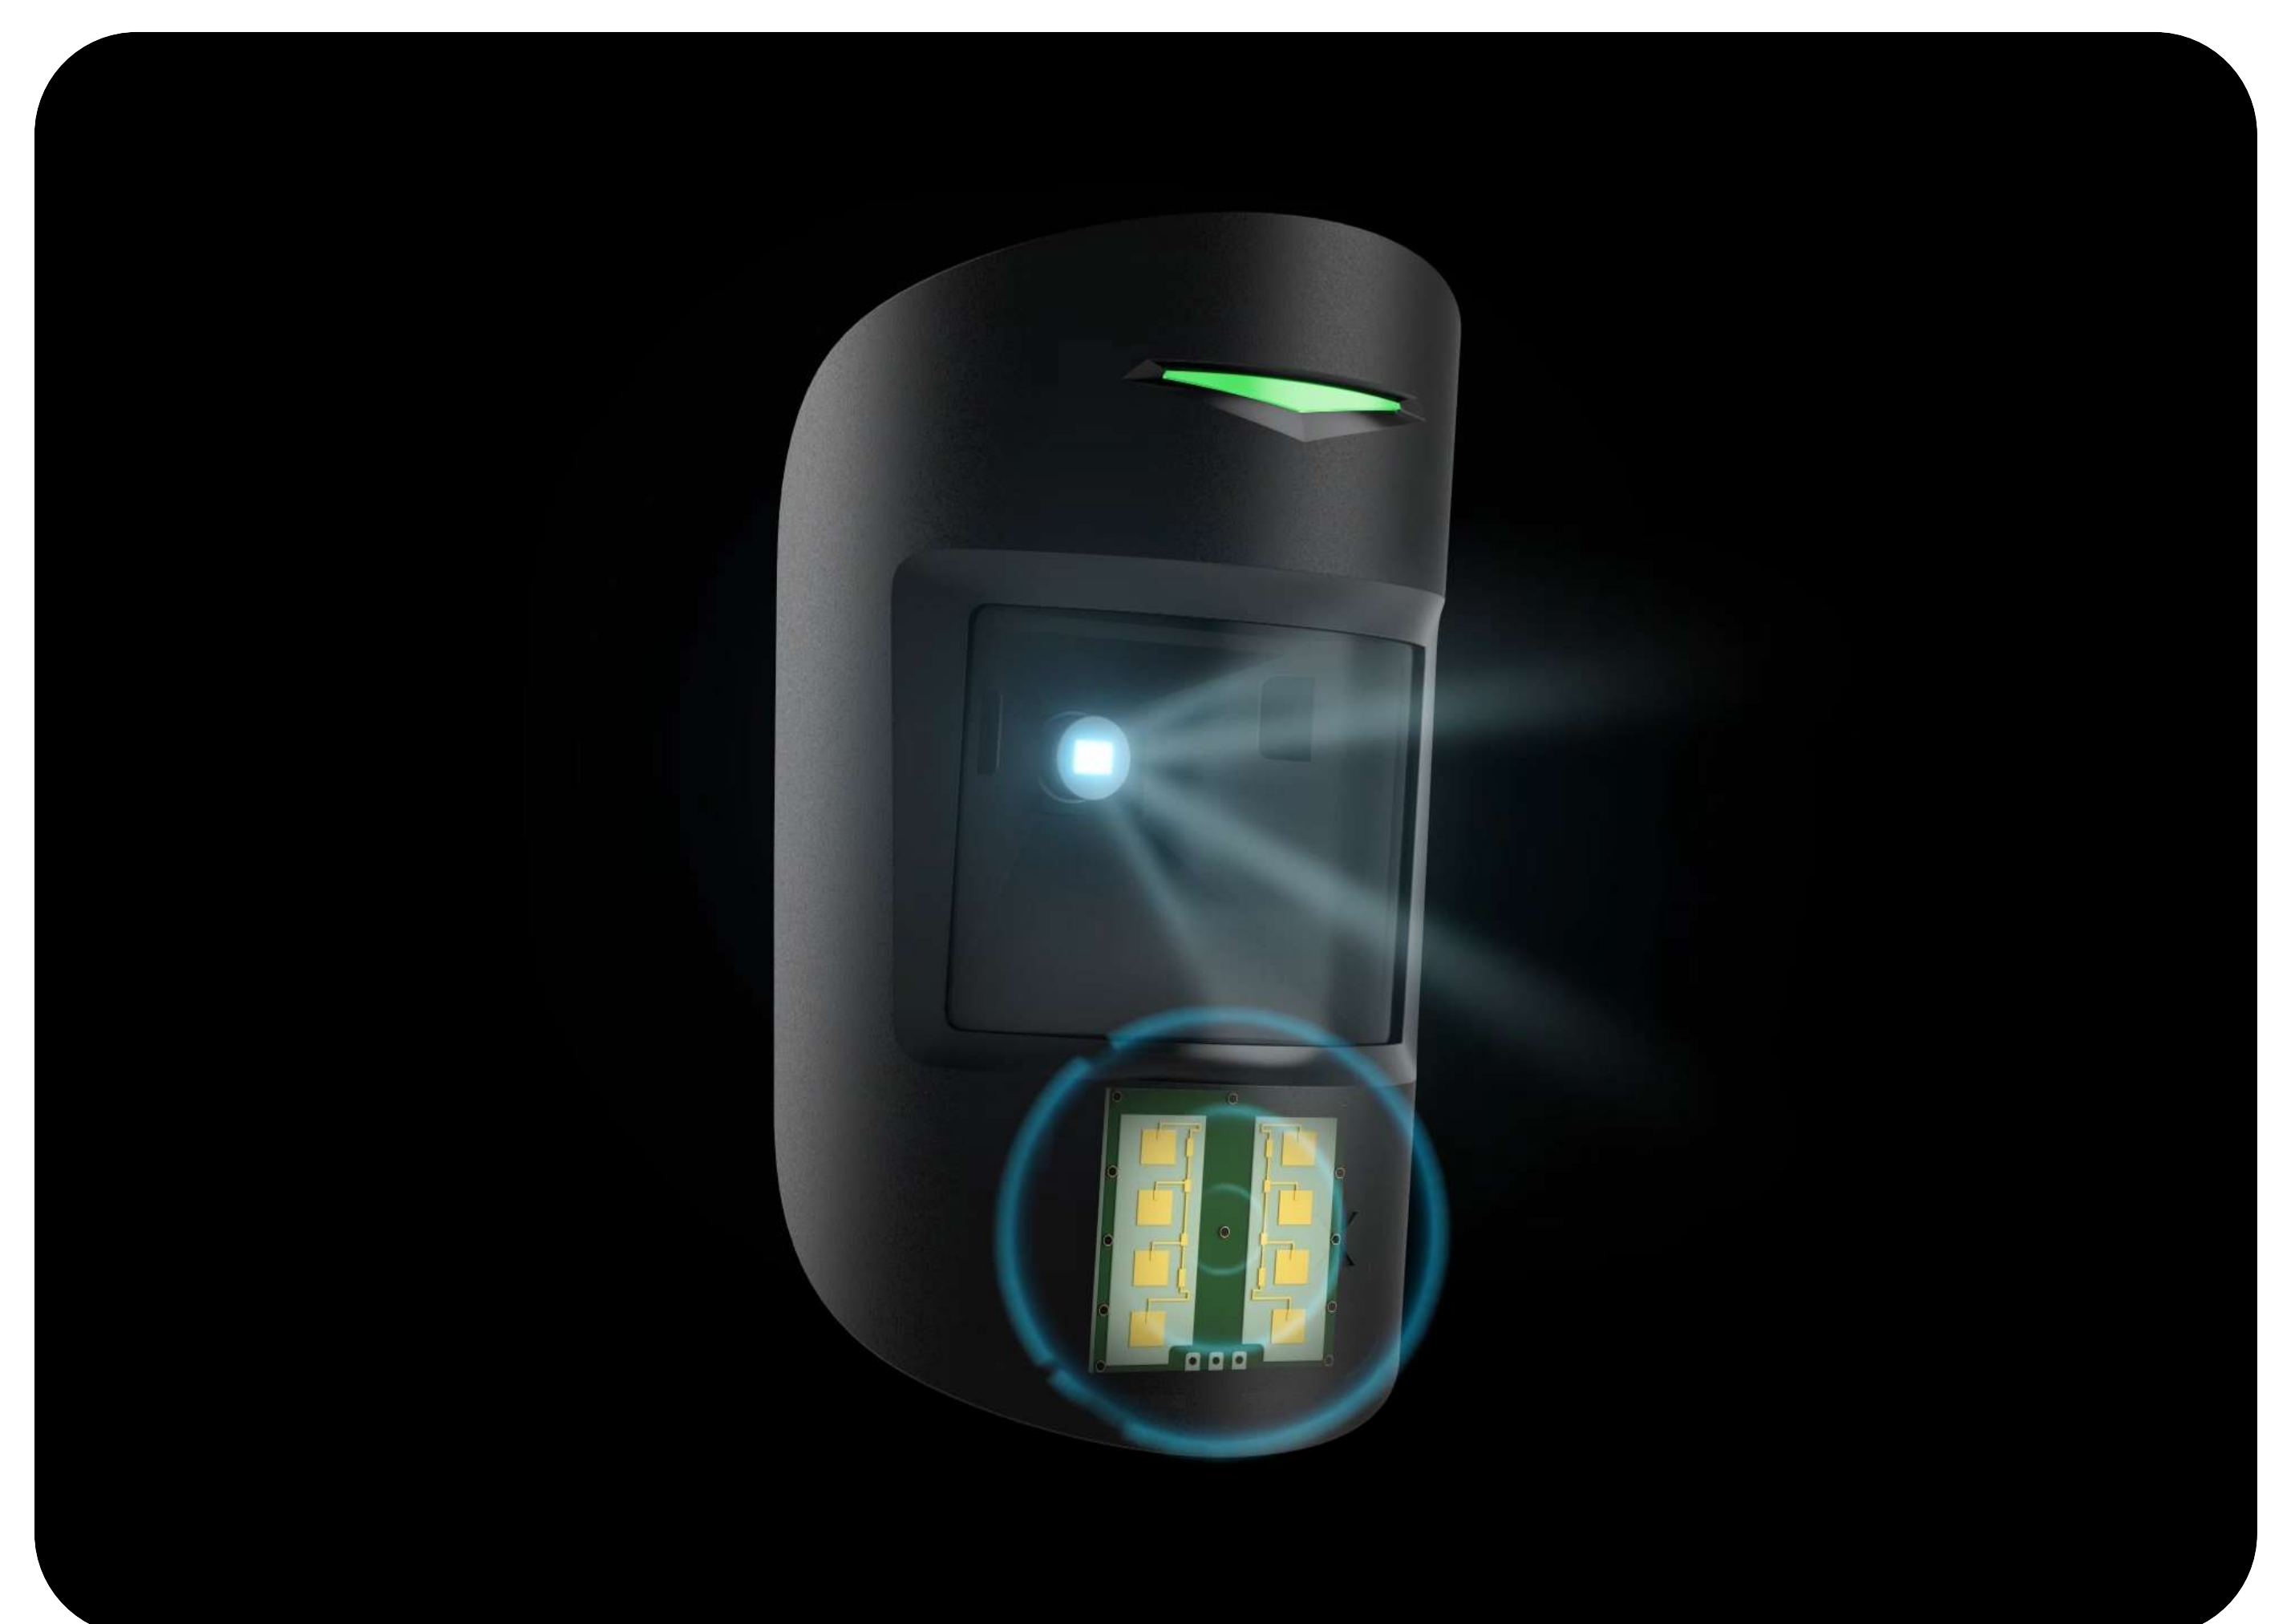

## Software

For additional protection against false alarms, the detector uses the SmartDetect algorithm. The armed detector constantly analyses the thermal diagram received from sensors: the intensity of IR radiation, the size of the thermal spots, the speed of movement and other parameters.




## Installation

When properly installed and configured, the detector does not react to common sources of false alarms and animals under 50 cm tall and 20 kg weight. For seamless installation, it has pre-installed Panasonic batteries and the SmartBracket mounting panel with a screw on the bottom. So, installers don't need to disassemble the detector and won't damage the electronics during installation.




## Flawless autonomy

MotionProtect S Plus is entirely autonomous, as it works on the pre-installed Panasonic battery. The Panasonic company proves to be an expert and professional in batteries that can significantly enhance the devices' reliability and overall battery life operation. Thanks to that, the device works for up to 5 years. The app will notify the installer a few months before the battery is fully discharged, so you have time to change it.



Up to 5 years of battery life



Notifications on low battery

## Encrypted two-way communication



Jeweller radio protocol provides fast and reliable two-way communication between the hub and devices. The protocol delivers instant data-rich alarms: security companies and users know which device was triggered when and where it happened.

Jeweller features **encryption** and **authentication** to prevent spoofing, and polling to monitor devices' statuses in real time. Supporting up to 1,200 m of wireless connectivity, Jeweller is ready to protect facilities and deliver the **best user experience** for both system owners and installers.



# Quick installation and start-up



## Easy to mount

Installing MotionProtect S Plus won't take much time. Using the SmartBracket panel, an installer can securely mount the device on the wall or in a corner without disassembling the detector's enclosure. An installer won't damage the hardware during installation, and the screw on the bottom of the device helps to make it safe.

## Quick pairing process

To pair MotionProtect S Plus with the hub, scan the QR code or enter the device ID manually using the desktop or mobile PRO app. An installer only needs to name the detector and assign it to the room and security group.




## Remote configuration


Intuitive Ajax apps provide remote set-up and all detector information from anywhere the Internet is available, on a smartphone or PC. The installer can remotely change the settings and provide services in time. No need to visit the facility.



# Sabotage resistance



Tamper alarm



Device authentication to prevent spoofing




Jamming detection



Holding screw to secure the device on SmartBracket

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

## Technical specifications

<p>Compliance with standards</p> <p><b>EN 50131-2-2 (Grade 2)</b>  <b>PD 6662:2017</b>  <b>INCERT</b> (coming soon)  <b>SSF</b> (coming soon)  <b>NFA2P</b> (coming soon)</p>	<p>Compatibility</p> <p><b>Hubs</b>  <b>Hub Plus</b>  <b>Hub 2 (2G)</b>  <b>Hub 2 (4G)</b>  <b>Hub 2 Plus</b>  <b>Hub Hybrid (2G)</b>  <b>Hub Hybrid (4G)</b></p> <p><b>Range extenders</b>  <b>ReX</b>  <b>ReX 2</b></p>
<p>Communication with control panel</p> <p> <b>Jeweller communication technology</b></p> <p><b>Frequency bands</b>  868,0 – 868,6 MHz</p> <p><b>Maximum effective radiated power (ERP)</b>  ≤ 20 mW</p> <p><b>Communication range</b>  up to 1,200 m  In an open space</p>	<p>Motion detection</p> <p><b>Sensitive element</b>  1 × PIR sensor  1 × K-band microwave sensor</p> <p><b>Detection distance</b>  up to 12 m<sup>1</sup>  When installed at a height of 2.4 m</p> <p><b>Detection angles</b>  horizontal – 88.5°</p>

1 – according to INCERT certification, detection range is up to 8 m (high sensitivity).